



1 PREPARE 2 TREAT 3 MAINTAIN

# EXTERIOR WOOD OIL

## PRODUCT DESCRIPTION

Exterior Wood Oil is to be used outdoor for basic treatment and maintenance of new and previously oiled wood surfaces such as decks, garden furniture, cladding etc. The special water-based composition of oil components ensures that the product is water-dilutable and friendly to the environment. The oil enhances the natural colour and grain of wood.

## APPLICATION AREA

For basic treatment and maintenance of new and previously oiled wood surfaces outdoor such as decks, garden furniture, cladding etc. May be used on traditional wood species such as pine and larch and on exotic species such as teak, mahogany, and ipé.

### Product information

Coverage: 8-12 m<sup>2</sup>/L

Packaging: 0.75L + 2.5L

Colours: 11 colours

\*Only available in 2.5L. Sold in full pallets only from January 1st 2020.



### High resistance

Penetrates deep into the wood. Provides a strong water and dirt-repellent surface. Provides long-lasting protection.



### Natural appearance

Enhances the natural colour and grain of the wood. Helps the wood stay beautiful and durable for longer.




### Easy application

The oil is smooth and pleasant to work with. Quick-drying. Water-based.



### UV-protection

All colours have UV-filter. Optimal protection against the sun. Minimises discolouration.

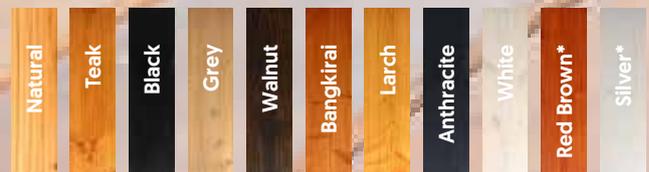



## WORK DESCRIPTION

### Preparation

Clean new wooden surfaces as well as old surfaces with WOCA Exterior Wood Cleaner before starting the oil treatment. Then leave the wood to dry for at least 24 hours so that the humidity is not above 17%. Sand down any rough wood fibres with sandpaper, grit 120. Make the application in dry weather only, min. temp. 13°C. Avoid direct sunlight and high temperatures.

### Please note


Non pressure-treated softwood and larch must be primed with the WOCA Exterior Wood Primer.

### Drying time

It takes 24 to 48 hours for the oil to harden thoroughly, depending on weather conditions and outdoor temperature. The wood must not be exposed to water during this period.

### Maintenance

Repeat the oil treatment when required. Start cleaning the surface with WOCA Exterior Wood Cleaner. Then follow the steps under basic treatment.



## TREATMENT

- 1 Stir the oil thoroughly before use.
- 2 Apply an even and thin coat of oil with a brush. Treat the end grain wood first. The wet oil may have a white shade. When the water has evaporated after a few minutes, the wood will appear oiled.
- 3 Wipe off any excess oil with clean cotton cloths after no more than 5 minutes. Take particular care of removing excess oil from joints and grooves.
- 4 If the surface does not appear saturated with oil, repeat steps.
- 5 When the wood is dry, it may be polished with a polishing pad or polishing machine to ensure an extra hard-wearing surface.