



1 PREPARE 2 TREAT 3 MAINTAIN

HARDWAX OIL SWIFT

APPLICATION AREA

Hardwax Oil Swift is for untreated, new or newly-sanded wooden surfaces.

It can also be used as a topcoat on top of WOCA Master Colour Oil.

RESULT

Hardwax Oil Swift is a roll-on product that ensures a robust surface with high resistance to spills, stains, marks and scratches.

It gives the floor a natural appearance and a comfortable anti-slip surface that is easy to maintain.

Product information

Coverage: 20 m²/L

Packaging: 2.5 L

Available in Natural (Matt and Silk-matt) and White (Matt and Silk-matt)



Good resistance

Robust surface with good resistance to spills, stains, marks and scratches.



Fast drying

Dry in 4-5 hours for light use/fully hardened in 7 days and ready for cleaning with water.




Easy to apply

Use a paint roller to apply a thin layer, repeat process if necessary.



Easy to maintain

No special tool required just use the standard WOCA system.





HOW TO...

...DO THE BASIC TREATMENT OF WOODEN FLOORS

Tools

The oil is preferably applied with a short-bristled paint roller (3-4 mm) or similar.

Preparation

The floor must be free of dirt, grease, wax and sanding residue. Previously treated floors should be sanded down to bare wood with grit 120-150. Vacuum thoroughly and wipe the floor down afterwards if necessary, using a tightly-wrung water-soaked cloth. Hardwax Oil Swift is ready for use.


It is important that the product, the room and the floor are at a temperature between 15 °C and 30 °C and that air humidity is approx. 50%. Wood humidity must not exceed 12%. Make sure that the room is well-ventilated for optimal evaporation and drying time.

Please note


Do not expose the floor to water or clean it for the first 7 days while the oil is hardening.

Maintenance and cleaning

For the cleaning, we recommend using WOCA Natural Soap or WOCA Oil Refreshing Soap, and for the maintenance we recommend WOCA Oil Care. Re-oil with Hardwax Oil Swift or WOCA Maintenance Gel as required.

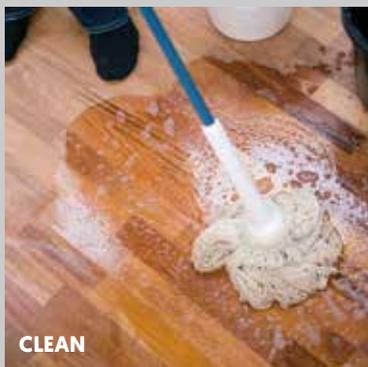

CLEAN

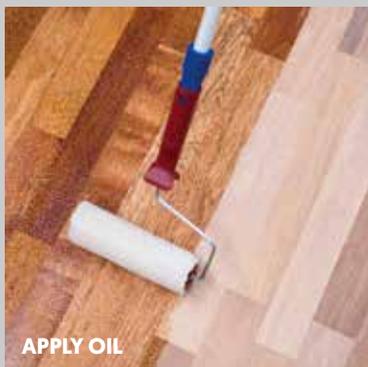

APPLY OIL

INSTRUCTIONS

- 1 Wash the floor with WOCA Intensive Wood Cleaner. Leave the floor to dry for at least 8 hours before applying the oil.
- 2 Thoroughly stir the container before and during use. Containers with different batch numbers should be mixed to avoid colour mismatch.
- 3 Apply a thin layer of oil using a short-bristled paint roller (3-4 mm) or similar, along the grain of the wood. Distribute the oil thoroughly.
- 4 Leave the floor to dry for 4-5 hours. Drying time will vary by temperature, humidity and application quantity. Lower temperatures and/or higher humidity can extend drying time.
- 5 Repeat steps 2-4 if another coat of oil is required. A single coat of oil is normally enough for previously-oiled surfaces.
- 6 The newly-oiled floor can be used with caution the following day.
- 7 Clean tools with WOCA Solvent.