



① PREPARE ② TREAT ③ MAINTAIN

COMMERCIAL OIL

PRODUCT DESCRIPTION

Commercial Oil is for use in high traffic areas, where deep cleaning and oiling of the wood is required, in a single process. The oil is quick drying and therefore ideal for buildings such as airports, railway stations and public areas where it is not possible to seal off an area for an extended period of time. Commercial Oil

cleans and maintains the wood thoroughly, leaving a surface that is both water-repellent and maintained.

APPLICATION AREA

For cleaning, oiling and care of previously oiled wooden floors.

Product information

Coverage: 100 m²/L

Packaging: 5 L



For oiled wood

Suitable for the regular maintenance of oiled wood floors in high traffic areas.



Simple and quick-drying

Drying time: 2 hours at 20°C.
Commercial Oil should be applied 2-4 times a year, or as required.



Easy to apply

Can be applied with a polishing machine. The oil is smooth and pleasant to work with.



For high traffic areas

Developed for fast treatment in public areas with intense traffic, e.g. airports and railway stations.





WORK DESCRIPTION

Preparation

It is important that the product, the room and the floor are at a temperature between 15°C and 30°C and that air humidity is approx. 50 %. Wood humidity must not exceed 12%. Make sure that the room is well-ventilated for optimal evaporation and drying time.


If the surface is very dirty and stained, we recommend cleaning with WOCA Intensive Wood Cleaner, diluted 1:20 using a buffing machine and green polishing pad before the first application of Commercial Oil.

Risk of self-ignition:

Cloths/pads that have been soaked in oil can self-ignite if disposed of incorrectly. Cloths etc. should therefore be stored in a tightly-sealed container full of water immediately after use, for proper disposal.

Maintenance and cleaning

For regular cleaning, use WOCA Master Soap, #511055A, for example every 2 or 3 days. Follow dosage instructions on the label. The soap is suitable for use in floor washing machines. Commercial Oil should be applied 2-4 times a year, or as required.

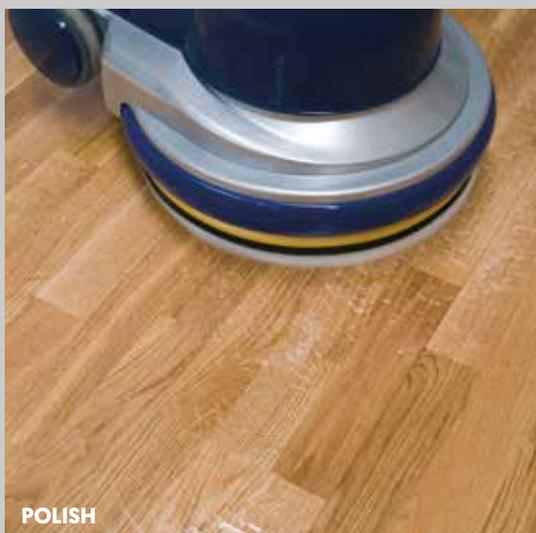

TREATMENT

- 1 Shake the container of Commercial Oil thoroughly.
- 2 Apply approx. 100 ml of Commercial Oil per 10-20 m². Apply the oil using a polishing machine and a green polishing pad. The oil should be polished well into the wood. Continue polishing until the wood seems saturated and the surface has an even, uniform appearance. The surface must not appear wet afterwards.

The floor can be used after a drying time of 2 hours at 20°C. Do not clean the floor or expose it to water during the first 24 hours, while the oil is curing.